

ALLEGHENY MILLWORK

QUALITY ASSURANCE QUALITY CONTROL PLAN

Division 06: Finish Carpentry, Architectural
Millwork & Casework

PROJECT INFORMATION

Project Name	
Project Number	
Submittal Date	
General Contractor	
Project Manager	
General Superintendent (Quality Manager)	
Superintendent (Daily Quality Oversight)	
AWI Climate Zone (1/2/3)	

Version/Date	Revised By	Notes
	Allegheny Millwork	Initial Use

Approved By	Signature	Title
		Quality Manager
		Project Manager

Documents provided by Allegheny Millwork disclose proprietary information. Please hold these documents in confidence and do not share them with other organizations. Submittal of documents does not transfer copyright ownership.

QUALITY ASSURANCE QUALITY CONTROL PLAN

TABLE OF CONTENTS

Allegheny Millwork Quality Policy	5
Key Elements of the Quality Plan.....	6
Project Quality Coordinator & Communication	8
Point of Contact List	8
Quality Communication Plan	9
Project Specific Quality Control Personnel.....	10
Job Position Assignments	10
Duties, Responsibilities & Authority	10
Personnel Qualifications	13
Qualifications of Subcontractors & Suppliers	13
Project Quality Specifications.....	14
Applicable Standards & Codes.....	14
Quality Grade Requirements	14
Special Control Quality Requirements	15
AWI Climate Conditions & Site Requirements	16
AWI Zone Data Table	16
AWI Zone Map.....	17
Required Site Conditions Summary.....	18
Site Condition Verification Process.....	19
Site Condition Waiver Form.....	19
Submittal Control.....	20
Storage & Protection of Installed Work.....	20
Inspection and Test Plan	21
Control of Measuring & Test Equipment.....	23
Work Task Quality Inspections.....	24
Material Quality Inspection	24
Daily Quality Control Report.....	24
Work Task Inspection Form.....	24
Quality Control of Corrections, Repairs & Nonconformances	25
Nonconformance Report.....	25
Project Completion Inspections.....	25
Pre-Punch-List Inspection	25
Quality Assurance Surveillance.....	26
Quality Audit Log	26
Control of Quality Records & Documents	27

Document Control	27
Formal FRI Process: Conflicts in Drawings, Specifications or Field Conditions.....	28
Servicing & Warranty.....	28
Warranty Summary	28
Site Condition Waiver Form.....	Appendix A
Daily Production/Quality Report.....	Appendix B
Work Task Inspection Form	Appendix C
Nonconformance Report.....	Appendix D
Pre-Punch-List Inspection.....	Appendix E
Quality Audit Log	Appendix F

ALLEGHENY MILLWORK QUALITY POLICY

Allegheny Millwork is committed to quality in all aspects of millwork, casework, and finish carpentry. Our objective is to safely deliver 100% complete construction projects that meet all contract and customer expectations the first time, every time.

Our commitment to quality means:

- Every Allegheny Millwork employee is responsible for fully implementing and complying with all provisions of the Allegheny Millwork Quality Plan.
- Our quality standards meet or exceed all applicable regulations, codes, industry standards, and manufacturer specifications, as well as the General Contractor contract and individual requirements.
- We stand behind our work. We inspect every work task to assure conformance to project requirements. Should problems be found, we correct them promptly so as not to disrupt workflow.
- We are always improving. All employees participate in improvements to remove quality risks and enhance quality performance.
- We conduct our work with dignity and respect for our customers, our subcontractor and supplier partners, and ourselves.

KEY ELEMENTS OF THE MILLWORK/FINISH CARPENTRY QUALITY PLAN

Key Elements of the Allegheny Millwork Quality Assurance/Quality Control Plan include:

QUALITY MANAGEMENT & RESPONSIBILITIES

Allegheny Millwork fully integrates its quality management into the organizational structure and performance management for each project. We maintain a quality plan consisting of quality policies and procedures, tightly control exceptions so company standards are applied uniformly, and systematically maintain quality documents and records.

QUALITY CONTROL PERSONNEL

Allegheny Millwork appoints a General Superintendent, Superintendent, and Project Manager to each project, each with well-defined quality responsibilities and the authority to carry them out. The General Superintendent has overall quality control authority. The onsite Superintendent serves as the Daily Quality Oversight and is the primary field-level quality authority.

AWI CLIMATE CONDITIONS & SITE REQUIREMENTS

Allegheny Millwork does not deliver or install wood products unless AWI/AWMAC § 3.2 site conditions are met; building enclosed, HVAC installed and in operation, temperature 60–90°F, relative humidity within the project's AWI Climate Zone range (Zone 1: 25–45%; Zone 2: 30–55%; Zone 3: 43–65%), and product acclimated for a minimum of 72 hours before installation. Allegheny Millwork deploys calibrated digital temperature and RH sensors in the work area to provide continuous, real-time monitoring throughout acclimation and installation. If the General Contractor directs Allegheny Millwork to proceed despite deficient conditions, a signed Site Condition Waiver is required. Sensor logs are retained as quality records.

PROJECT QUALITY COORDINATION & COMMUNICATION

Allegheny Millwork tightly controls the construction process to ensure quality results. We plan quality communications through meetings, reporting requirements, and points of contact. We hold a project startup meeting to communicate project goals and expectations and conduct preparatory meetings in advance of each scheduled work task. We use the most up-to-date drawings and specifications in coordination with the General Contractor.

INSPECTIONS PLAN

Allegheny Millwork quality inspection processes ensure all work activities comply with documented standards. We complete quality control documentation before products leave the shop and ship to site. Once finished products arrive at the jobsite, the Superintendent completes a second review to confirm quality of finished products.

WORK TASK QUALITY INSPECTIONS

Allegheny Millwork conducts a series of quality inspections for each construction task: before work begins (job-ready), at first article completion, while work is in process, and at completion. All materials are inspected before use. Inspection results are recorded and maintained in project files.

SUBMITTAL CONTROL

Allegheny Millwork controls all submittals — shop drawings, product data, samples, and certifications — to ensure they are reviewed and approved before fabrication or procurement begins. No work may proceed without an approved submittal. Resubmittals are tracked until formal approval is received from the General Contractor.

NONCONFORMANCE CONTROL

Allegheny Millwork nonconformance control processes ensure that all nonconformances are clearly identified, prevented from inadvertent use or cover-up, corrected in a timely manner, and validated for effectiveness. Customer approval is obtained before accepting any nonconforming items. Root causes are identified and preventive actions are implemented.

PROJECT COMPLETION INSPECTIONS

Allegheny Millwork conducts a rigorous pre-punch-list inspection by personnel independent of production before requesting the General Contractor final walk. Any deviations are corrected and reinspected. We participate in the customer's final inspection and quickly address any issues found.

QUALITY ASSURANCE SUREILLANCE

Allegheny Millwork audits the quality system on each project for conformance to the Project QA/QC Plan. The General Superintendent conducts periodic audits and document findings. Annual company-wide audits evaluate overall effectiveness and drive improvements.

PROJECT QUALITY COORDINATION & COMMUNICATION

Allegheny Millwork has regular, planned communications with the General Contractor, subcontractors, and suppliers to coordinate quality expectations, priorities, activities, and improvements.

The process begins when we hold a pre-construction meeting where we discuss how quality will be controlled and the quality responsibilities of key personnel. We also coordinate a schedule for weekly production meetings, monthly quality management meetings, and protocols for telephone and digital communications.

Specific to this project, the onsite Superintendent will participate in the weekly subcontractor coordination meeting held by the General Contractor.

Throughout the project, Allegheny Millwork holds preparatory meetings prior to the start of upcoming milestones, tasks, or phases of work. These meetings are attended by key company and subcontractor personnel responsible for carrying out, supervising, or inspecting the work, and interested the General Contractor representatives. We review quality requirements, coordinate quality inspections and hold points, and listen to each stakeholder's concerns for critical details. Critical details are added to inspection documentation and reinforced in weekly toolbox talks.

POINT OF CONTACT LIST

Company	Name	Position	Phone	Email
Allegheny Millwork		Project Manager		
Allegheny Millwork		Project Manager		
Allegheny Millwork		General Superintendent (Quality Manager)		
Allegheny Millwork		Superintendent (Daily Quality Oversight)		
Allegheny Millwork		Safety Manager		
		GC Project Manager		
		GC Superintendent		

QUALITY COMMUNICATIONS PLAN

Distribution of Project Organization Chart/Roles & Responsibilities	
Points of Contact List Distribution	
Project Startup Meeting: Participants, Date & Location	
Weekly Sub Coordination Meeting with the General Contractor: Day, Time, Location	
Preparatory Meeting Schedule (Per Work Task)	
Weekly Toolbox Talk: Frequency & Location	
Daily Quality Report: Frequency & Due Date	
Monthly Quality Status Report: Distribution & Due Date	
Inspection & Test Records: Distribution & Due Date	
Nonconformance Report: Distribution & Approval Authority	
Quality Records Storage Location & Point of Contact	
Frequency of Project Quality Audits & Auditor	
Digital Platform Used for Field Reporting/Issue Tracking:	
Customer-Supplier Materials Warehousing/Security Plan	

PROJECT SPECIFIC QUALITY CONTROL PERSONNEL

Allegheny Millwork ensures that quality control personnel remain independent from the pressures of production through our organizational lines of authority. Allegheny Millwork appoints a General Superintendent, Superintendent, and Project Manager, and then assigns each with specific quality responsibilities and authorities of their job position.

PROJECT QC POSITION ASSIGNMENTS

QC PERSONNEL NAME	JOB POSITION
	Senior Project Manager
	Project Manager
	General Superintendent (Quality Manager)
	Superintendent (Daily Quality Oversight)
	Safety Manager

DUTIES, RESPONSIBILITIES & AUTHORITY OF QUALITY CONTROL PERSONNEL

The Project Manager has overall administrative responsibility for the project. The General Superintendent has overall quality control authority across all Allegheny Millwork projects. Key project personnel have accepted their appointments and declared their ability to carry out the appointments.

General Superintendent (Quality Manager): Duties, Responsibilities & Authority

The General Superintendent has overall responsibility for ensuring the effectiveness of the Quality Plan across all Allegheny Millwork projects and for this project specifically. The General Superintendent is responsible for:

- Planning and approving project quality controls required by the Allegheny Millwork Quality Plan and contract requirements.
- Reviewing and approving project-specific Quality Plans before submittal to the General Contractor.
- Fully implementing all provisions of the Allegheny Millwork Quality Plan and related documents on the project.
- Managing the operations of the Quality Plan on the project.
- Implementing and managing all phases of quality control.
- Communicating project-specific quality requirements to all affected departments, subcontractors, suppliers, and the General Contractor.
- Reviewing AWI site condition sensor data and verifying conditions are met prior to authorizing delivery and installation schedules.

- Approving or rejecting Site Condition Waivers presented by the General Contractor.
- Monitoring progress of activities and identifying quality problems before they affect the work.
- Serving as the primary quality liaison with the General Contractor senior management on quality matters.
- Performing periodic quality reviews, audits, and unannounced site visits to verify quality standards are being maintained.
- Reviewing Site Audit weekly quality reports and Superintendent daily reports, and escalating concerns to senior management.
- Reviewing and resolving significant nonconformances.
- Controlling corrective actions and verifying their implementation and effectiveness.

The General Superintendent has the authority to:

- Stop work on any project when continuing work may adversely affect quality or cover up a defect.
- Remove and replace any non-conforming work, equipment, or material by Allegheny Millwork, any subcontractor, or any supplier.
- Override a field-level quality decision when necessary to protect the integrity of the work or the interests of the company and client.
- Suspend work and/or supply of materials by any staff member, subcontractor, or supplier as deemed necessary to assure quality results.

Superintendent (Daily Quality Oversight): Duties, Responsibilities & Authority

The Superintendent serves as the Daily Quality Overseer on the project. The Superintendent is the primary field quality control authority and is responsible for all day-to-day quality inspections, documentation, and site condition monitoring. The Superintendent verifies that the work performed by subcontractors, suppliers, and Allegheny Millwork work crews conforms to Allegheny Millwork quality standards and AWI requirements.

The Superintendent is specifically responsible for:

- Verifying and documenting AWI site conditions — reviewing sensor data and on-site readings for temperature and relative humidity — before, during, and after installation.
- Refusing to proceed with delivery or installation if site conditions do not meet AWI requirements, unless a signed Site Condition Waiver has been executed by the General Contractor.
- Ensuring that work meets regulatory, code, the General Contractor contract, and Allegheny Millwork quality standards and specifications.
- Ensuring all materials are inspected upon delivery and that non-conforming materials are tagged, quarantined, and removed promptly.
- Conducting all work task quality inspections — job-ready, first article, work in process, and completion — and completing all required forms.

- Completing daily reports, JSAs/JHAs, and any documentation required by the General Contractor through the GC's designated reporting platform. Completing weekly site inspection reports in Site Audit covering all areas within Allegheny Millwork scope — including photographs, observations, open items, and AWI site condition readings.
- Accurately assessing subcontractor quality and on-time performance.
- Ensuring that quality standards are achieved before approving subcontractor or work crew completion of work.
- Documenting all issues, actions, and resolutions with photographs and written descriptions.

The Superintendent has the authority to:

- Stop work when continuing work may adversely affect quality or cover up a defect.
- Refuse delivery of materials that do not meet specifications or arrive under unacceptable site conditions.
- Prevent the use of equipment or materials that may adversely affect quality.
- Direct the removal and replacement of any non-conforming work, equipment, or material.
- Suspend work and/or supply of materials as deemed necessary to assure quality results.

Note: Alternate Superintendents have the same quality duties, responsibilities, and authority. Multiple Superintendents may be assigned to the project.

Project Manager: Quality Responsibilities

- Ensures contract requirements are clearly understood prior to project start.
- Manages the submittal process; shop drawings, product data, samples, and certifications.
- Communicates quality requirements and approved submittal details to field personnel.
- Reviews and approves all project quality-related submittals before forwarding to GC.
- Escalates persistent quality issues to the General Superintendent.
- Coordinates with GC project team on quality expectations, issues, and schedule impacts.
- Receives and reviews weekly Site Audit quality reports from the Superintendent and coordinates resolution of open items.

PERSONNEL QUALIFICATIONS

Allegheny Millwork ensures that only knowledgeable, capable employees carry out the planning, execution, and control of the project. We train our employees on quality standards and procedures based on project requirements and their job positions. We then validate their capabilities before they are assigned to carry out quality responsibilities on the project. Ongoing monitoring of performance continually validates qualifications of each employee.

The General Superintendent qualifies employee capabilities to ensure they are capable of completely carrying out their assigned quality responsibilities, including:

- Knowledge of company quality standards and millwork / finish carpentry specifications.
- Licensing requirements for the applicable scope and jurisdiction are identified and confirmed prior to personnel assignment.
- Knowledge of job responsibilities and authority.
- Demonstrated skills: reading shop drawings, understanding AWI standards, installation best practices.
- Demonstrated ability and results from prior projects.
- Required training completed and documented.
- Required experience for the assigned work scope.

The General Superintendent also evaluates independent contractor personnel on the same standards that apply to employees.

QUALIFICATIONS OF SUBCONTRACTORS & SUPPLIERS

Allegheny Millwork evaluates outside organizations to ensure that the quality of their materials or services will meet contract requirements, and that they have the capacity and equipment to carry out the contract on schedule.

The onsite Superintendent reviews and assesses all materials supplied.

Our subcontractors and suppliers meet project requirements by either:

1. Working under the Allegheny Millwork Quality Plan
2. Operating their own quality program as long as it meets the Allegheny Millwork Quality Plan requirements.

PROJECT QUALITY SPECIFICATIONS

Fulfilling customer contract expectations is a primary objective of the Allegheny Millwork Quality Plan. To ensure that customer expectations will be fulfilled, Allegheny Millwork clearly defines the requirements for each contract before it is approved.

The Project Manager ensures that the information in customer contracts clearly defines customer expectations and that the necessary details are provided to set requirements for construction. Allegheny Millwork personnel and subcontractors and suppliers are accountable for compliance to standards-based written specifications.

Standards ensure that results are specified rather than left to discretionary practices. All construction activities comply with generally accepted good workmanship practices and industry standards.

APPLICABLE STANDARDS & CODES

- AWI Architectural Woodwork Standards (AWS): current edition (shop is AWI certified)
- NKBA National Kitchen & Bath Association standards; as applicable
- BHMA/ANSI hardware standards for finish hardware
- ADA Accessibility Guidelines (ADAAG) for applicable millwork elements
- Local and state building codes and adopted fire codes
- Project specifications, Division 06: Wood, Plastics, and Composites
- Manufacturer installation instructions for all specified products

QUALITY GRADE REQUIREMENTS

Work Scope	Specified Quality Grade/Standard
Architectural Woodwork/Casework	AWI Custom Grade (Or as Specified)
Interior Finish Carpentry	AWI Premium/Custom as Specified
Exterior Finish Carpentry	AWI Premium/Custom as Specified
Wood/Plastic Composite Trim	Manufacturer Specifications + AWI
Plastic Laminate Casework	AWI Custom Grade HPDL
Hardware	BHMA Grade 1 (Unless Specified Otherwise)

SPECIAL CONTRACT QUALITY REQUIREMENTS

Copy any applicable contract special quality requirements here:

AWI CLIMATE CONDITIONS & SITE REQUIREMENTS (AWI 200 §3.2)

Allegheny Millwork does not deliver or install wood products unless AWI/AWMAC site conditions are met per AWI 200 § 3.2: Care & Storage, or unless the General Contractor executes a signed Site Condition Waiver accepting full responsibility for resulting damage. This policy is a firm company standard and is not subject to schedule pressure or GC direction alone.

Wood is a hygroscopic material; it absorbs and releases moisture in response to its environment. Delivering or installing wood products into a space that is too wet, too dry, too hot, or too cold causes irreversible dimensional change, warping, joint failure, delamination, and finish cracking. These defects are not warranty-eligible when caused by failure to meet AWI installation conditions.

AWI CLIMATE ZONE DATA TABLE (AWI 200 § 3.2.4)

The project AWI Climate Zone is identified on Page 2. The design professional designates the applicable zone. In the absence of a specific zone designation, Zone 2 is the default per AWI Standard.

Climate Zone		Optimum Wood Product Moisture Content		Optimum Climate Controlled Relative Humidity
		Non-Climate Controlled Interior or Exterior Environment	Climate Controlled Environment	
Zone 1	Dry	7-12%	4-9%	25-45%
Zone 2	Moderate	9-15%	6-10%	30-55%
Zone 3	Damp	10-15%	8-13%	43-65%

AWI CLIMATE ZONE MAP: (FIGURE 1 ADAPTED FROM FOREST PRODUCTS LABORATORY 2010 WOOD HANDBOOK)

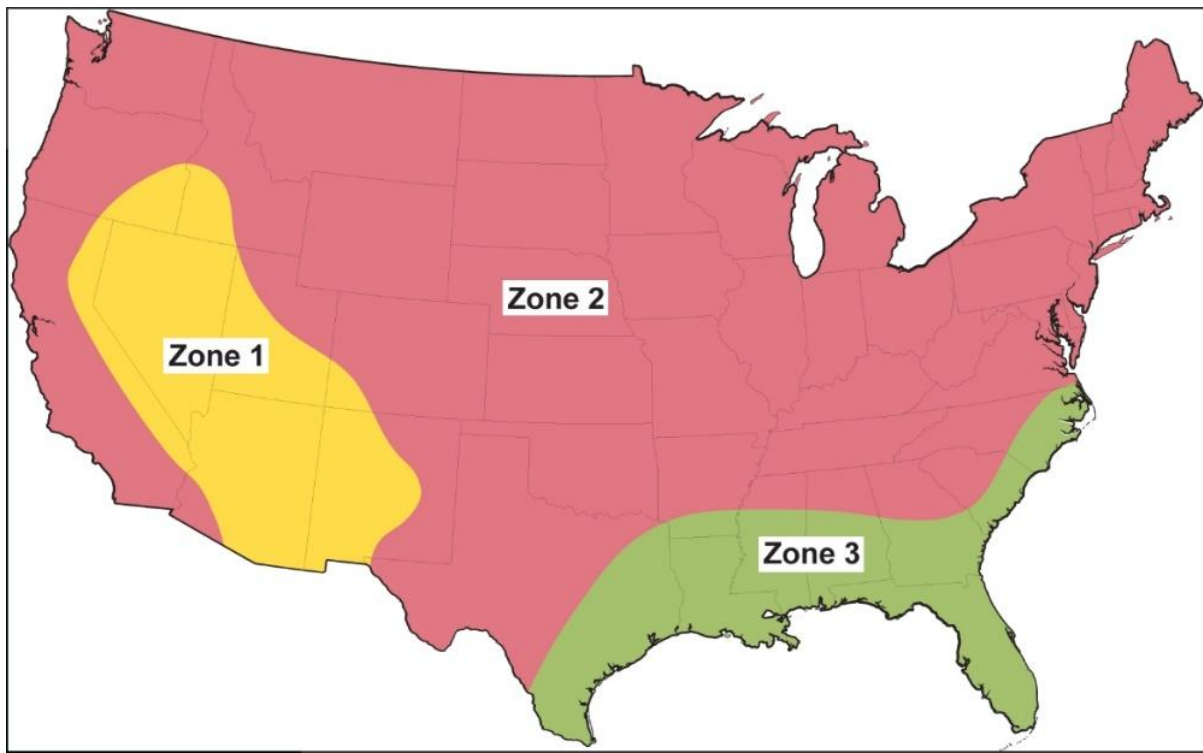


Figure 1 – AWI Climate Zone Map. Zone (Dry): Interior West. Zone 2 (Moderate): Most of the Continental US. Zone 3 (Damp); Southeast Coastal Areas. Source: AWI/AWMAC Architectural Woodwork Standards

AWI § 3.2 REQUIRED SITE CONDITIONS: SUMMARY

AWI 200 § 3.2: Required Site Conditions (Climate Controlled Applications)	
§ 3.2.1 Delivery	• Wet Work (concrete, plaster, drywall) must be dry. • Overhead work must be complete. • Area must be broom clean.
§ 3.2.2 Handling	• Handle with clean hands or gloves • Protect product from marks or damage at all times
§ 3.2.3 Storage on Site	• Store on a flat, level, clean surface that is elevated off the floor • Protect from sunlight, excessive heat, cold, moisture & RH Variations outside tolerances below
§ 3.2.4 Environmental Controls	• Building must be cleaned & closed • HVAC must be installed & operational • Relative Humidity Must be maintained within tolerances for projects AWI Climate Zone (table & map above) Zone 1 (Dry): 25-45% RH Zone 2 (Moderate): 30-55% RH Zone 3 (Damp): 43-65% RH • If no zone is specified by the design professional, Zone 2 is the default
§ 3.2.5 Acclimation	• Product shall be acclimated to the environment in which it will be installed for a minimum of 72 hours prior to installation.
§ 3.2.6 Installation/Post-Installation	• Temperature shall be maintained between 60°F & 90°F (15.5-32°C) • Relative humidity shall not fall outside the acceptable zone range for a sustained period of more than 24 hours for any reason.
§ 3.2.7 Verification: Continuous & Daily	• Allegheny Millwork deploys calibrated digital temperature & relative humidity sensors in the work area prior to delivery. Sensors provide continuous, real-time readings that can be monitored remotely & are logged automatically throughout the acclimation & installation periods. • The Superintendent reviews sensor data at the start & end of each workday & records the readings in the daily report and the weekly Site Audit Pro inspection report. If the readings fall outside the required zone range at any time, work stops immediately & the General Contractor is notified in writing.

SITE CONDITION VERIFICATION PROCESS

Allegheny Millwork uses calibrated digital temperature and relative humidity sensors placed directly in the work area to monitor site conditions continuously throughout the acclimation and installation period. Sensor data is reviewed in real time and logged automatically, providing a documented record of conditions that protects both Allegheny Millwork and the General Contractor and supports any waiver decision. The Superintendent is responsible for the following process per AWI 200 § 3.2.4:

- Prior to scheduling delivery: The General Superintendent contacts the General Contractor to confirm HVAC is operational and the building is enclosed. A pre-delivery site visit is conducted to verify conditions first-hand. Sensors are placed in the installation area to begin monitoring.
- Sensor data is reviewed remotely and on-site. If conditions are stable and within the AWI zone range for the required period, delivery is scheduled. Product is acclimated on site for a minimum of 72 hours before installation begins (AWI § 3.2.5), with sensors confirming stable conditions throughout.
- If sensor data or on-site readings show conditions are out of range: Allegheny Millwork notifies the General Contractor in writing (email or letter) documenting the specific deficiency with actual readings from the sensors. Delivery and installation are placed on hold.
- If the General Contractor directs Allegheny Millwork to proceed despite deficient conditions: A Site Condition Waiver must be signed by an authorized the General Contractor representative; with actual sensor readings at time of waiver noted on the form, before Allegheny Millwork will proceed. A copy is retained and filed with project quality records.
- During installation: The Superintendent reviews sensor data each morning before work begins and each afternoon at close of work. Readings are recorded on the Daily Quality Control Report. If readings leave the acceptable zone range at any point, work stops immediately and the General Superintendent is notified.
- Sensor logs are retained as part of the project quality record and are available to support warranty claims or dispute resolution.

SITE CONDITION WAIVER FORM

In the event that the General Contractor directs Allegheny Millwork to proceed when AWI site conditions are not met, a Site Condition Waiver Form must be completed and signed before any work proceeds.

The Site Condition Waiver Form can be found as Appendix A at the end of this Quality Plan.

SUBMITTAL CONTROL

Allegheny Millwork controls all submittals to ensure they are reviewed and formally approved before fabrication or procurement begins. No work may proceed based on an unapproved submittal. The Project Manager tracks all submittals throughout the project.

Submittals required for this project include (but are not limited to):

- Shop drawings for all custom millwork and casework units
- Product data for all manufactured components, hardware, and specialties
- Samples: species/veneer/finish samples, hardware samples
- If applicable, certificates of conformance confirming AWI grade compliance
- Finish and color selections confirmed in writing
- Hardware schedule: keying schedule if applicable
- Warranty documentation and O&M manuals at project closeout

STORAGE & PROTECTION OF INSTALLED WORK

- Allegheny Millwork protects all installed millwork from the floor to 4 feet high using appropriate covering materials. This protection is provided and owned by Allegheny Millwork and remains in place until final inspection.
- Allegheny Millwork's installation is performed one time only. Any removal or reinstallation of Allegheny Millwork's work required by other trades or for access purposes is the responsibility of the General Contractor or the requesting trade. Allegheny Millwork will reinstall at additional cost.
- Overhead panel work is mechanically fastened at all attachment points. Adhesive alone is not acceptable for any overhead installation.

INSPECTION AND TEST PLAN

Allegheny Millwork identifies inspections and tests that will be performed during the project. A record is completed for each test. Results are used for monitoring compliance to the plan and tracking results. The General Superintendent evaluates project requirements and determines if there are measuring devices that require controls to assure quality results.

Spec #	Section/Description	Test/Inspection Required	Frequency	Performed By	Date Completed	Remarks
ALL	All Scopes	AWI Site Conditions: Temp & RH Verified	Each Site Visit	[SUPERINTENDENT]		
ALL	All Scopes	AWI Site Conditions documented on Daily Report	Each Work Day	[SUPERINTENDENT]		
06 41 00	Casework	Shop Drawing Approval	Prior to Fabrication	[PROJECT MANAGER]		
06 41 00	Casework	Material Inspection: Species, Grade, Finish	Each Delivery	Supplier		
06 41 00	Casework	First Article Inspection	First Unit Installed	[GENERAL SUPERINTENDENT]		
06 41 00	Casework	Alignment/Level/Plumb Check	Each Install Area	[SUPERINTENDENT]		
06 41 00	Casework	Hardware Function Test	Each Unit	[SUPERINTENDENT]		

Spec #	Section/Description	Test/Inspection Required	Frequency	Performed By	Date Completed	Remarks
06 20 00	Trim/ Millwork	Material Inspection: Species, Moisture	Each Delivery	Supplier		
06 20 00	Trim/ Millwork	First Article Inspection	1 st Run Installed	[GENERAL SUPERINTENDENT]		
06 20 00	Trim/ Millwork	Joints/ Mitters/ Copes Inspection	Each Room /Area	[SUPERINTENDENT]		
06 20 00	Trim/ Millwork	Fastening Pattern Inspection	Each Installatio n	[SUPERINTENDENT]		
06 20 13	Exterior Finish Carpentry	Back-Prime Verification	Each Delivery	Supplier		
06 22 00	Millwork Panels	Flatness/ Bow Check	Each Panel	[SUPERINTENDENT]		
08 71 00	Hardware	Hardware Function Test: Doors /Drawers	Each Unit	[SUPERINTENDENT]		

CONTROL OF MEASURING & TEST EQUIPMENT

Equipment	Calibration Frequency	Notes
Digital Moisture Meter	Annual/Per Manufacturer	• Verify Against Reference Material Before Each Use
Laser Level/Level	Before Each Project	• Replace Batteries • Check Vial Integrity
Tape Measure	Inspect Monthly	• Replace if stretched or damaged
Square/Speed Square	Inspect Each Project	• Verify Accuracy on Flat Surface
Humidity & Temperature Sensors	Before Each Project	• Calibrate Digital Sensors • Deployed in Work Area Prior to Delivery for Continuous Monitoring of Temperature and RH Throughout acclimation & installation. • Logs Retained as Quality Records

WORK TASK QUALITY INSPECTIONS

Allegheny Millwork identifies a list of work tasks; phases of production, which will be quality controlled. Each work task is subject to a series of inspections; before, during, and after the work is complete. Each inspection verifies compliance with the full scope of the relevant specifications, not limited to checkpoints for heightened awareness.

- The initial task-ready inspection occurs when crews are ready to start work and ensures that work begins only when it does not adversely impact quality results.
- Incoming material inspections verify that materials are as specified and meet all requirements necessary to assure quality results.
- Work-in-process inspections continuously verify that work conforms to project specifications and workmanship expectations. Work continues only when it does not adversely impact quality results.
- At completion of the task, an inspection verifies that work and materials have been completed in accordance with project quality requirements. When appropriate, functional tests are performed.

The onsite Superintendent uses digital tools for daily reports and field issue tracking, sharing findings with the Project Manager and Project Management team to resolve quality issues promptly. Each entry includes a description of the scope and location of the issue and photographs.

MATERIAL QUALITY INSPECTION

Material Quality Inspection ensures that purchased materials meet purchase contract quantity and quality requirements. The Superintendent inspects all delivered materials before use and rejects any that do not meet specified requirements. Rejected materials are tagged and removed from the site promptly.

DAILY PRODUCTION/QUALITY REPORT

The Superintendent records a summary of daily work activities. One report per work day. This report will include:

1. Schedule activities completed.
2. General description of work activities in progress.
3. Problems encountered, actions taken, and delays.
4. Meetings held, participants, and decisions made.
5. Subcontractor, supplier, and company crews on site.
6. Visitors and purpose.
7. General remarks and improvement ideas.
8. Weather conditions.

The Daily Production/Quality Report can be found as Appendix B at the end of this Quality Plan.

WORK TASK INSPECTION FORM

Complete one form per work task per inspection event. Attach to project quality records.
The Daily Production/Quality Report can be found as Appendix C at the end of this Quality Plan.

QUALITY CONTROL OF CORRECTIONS, REPAIRS & NONCONFORMANCES

Should a problem occur in the quality of work, Allegheny Millwork systematically contains the issue and quickly makes corrections. The General Contractor will communicate QC issues through their preferred platform. The onsite Superintendent will share findings with the Project Manager and the Project Management team and work for a speedy resolution. Our first action is to clearly mark the item by tape, tag, or other easily observable signal to prevent inadvertent cover-up or continued use.

Then we expedite corrective action that brings the workmanship or material issue into conformance by repair, replacement, or rework. Previously completed work is reinspected for similar nonconformances. In the event that we cannot correct the item to meet contract specifications, the customer will be notified, and customer approval of corrective actions is required before proceeding.

Fixing problems found is not sufficient. Allegheny Millwork systematically prevents recurrences to improve quality. Enhanced controls and management monitoring are put into place to ensure work proceeds without incident. Using a structured problem-solving process, Allegheny Millwork identifies root causes and initiates solutions. Solutions may involve enhanced process controls, training, upgrading of personnel qualifications, improved processes, and/or higher-grade materials. Follow-up ensures that a problem is completely resolved.

NONCONFORMANCE REPORT

The Nonconformance Report can be found as Appendix D at the end of this Quality Plan.

PROJECT COMPLETION INSPECTIONS

Allegheny Millwork conducts a series of inspections near the end of each project to assure that the contracted work is completed to specifications.

Near the end of the project or a milestone, the onsite Superintendent and the General Superintendent participate in the inspection of the completed project and verify conformance to contract specifications. Any deviations are corrected and reinspected before submitting the project to the customer for final inspection.

If the customer performs a final inspection, corrections are quickly addressed, reinspected by the General Superintendent, and then submitted for customer final review.

PRE-PUNCH-LIST INSPECTION: CONDUCTED BY GENERAL SUPERINTENDENT & SUPERINTENDENT

The Pre-Punch-List Inspection Form can be found as Appendix E at the end of this Quality Plan.

QUALITY ASSURANCE SURVEILLANCE

Allegheny Millwork audits the quality system on each project for conformance to the Project QA/QC Plan and the Allegheny Millwork Quality System requirements.

The General Superintendent conducts periodic quality audits to verify that the Quality Plan is being implemented, that inspections are being performed and documented, and that nonconformances are being properly addressed. Audit findings are documented and corrective actions are tracked to closure.

QUALITY AUDIT LOG

The Quality Audit Log can be found as Appendix F at the end of this Quality Plan.

CONTROL OF QUALITY RECORDS & DOCUMENTS

Allegheny Millwork maintains project quality records for the duration of the project and for the retention period required by contract. Records are organized, legible, retrievable, and protected from deterioration or damage.

The following quality records are maintained for this project:

- Shop Drawings, Product Data & Samples: approved submittals on site at all times; copies filed with Allegheny Millwork project records.
- Submittal Log: tracked throughout project from initial submission through final approval.
- Work Task Inspection Forms: completed and filed per task.
- Daily Production Reports: filed each week.
- Nonconformance Reports: filed and tracked to closure, including preventive action records.
- Inspection & Test Records: filed and forwarded to the General Contractor per communications plan.
- Training Records: filed in project quality file.
- Subcontractor/Supplier Qualification Records: filed prior to work start.
- Punch List & Completion Inspection Records: filed at project closeout.

DOCUMENT CONTROL

Location of Project Quality Records:	
Person Responsible for Records Access:	
Minimum Retention Period:	
Electronic Backup/Cloud Storage Location:	
Field Reporting Platform (e.g. ProCore, PlanGrid, FieldWire)	

FORMAL RFI PROCESS: CONFLICTS IN DRAWINGS, SPECIFICATIONS OR FIELD CONDITIONS

- Any conflict, discrepancy, or ambiguity between contract drawings and specifications, or between documents and field conditions, must be submitted as a formal RFI through the GC's designated platform before any work proceeds.
- No field improvisation or independent deviation from the contract documents is permitted. Work stops at the point of conflict until an RFI response is received.
- The Project Manager is responsible for identifying, logging, and submitting all RFIs promptly. RFIs are tracked in the document control log.
- Allegheny Millwork notifies the General Contractor immediately upon identifying any conflict — an RFI response is required before work in the affected area continues.

SERVICING & WARRANTY

Allegheny Millwork will provide warranty services, per the contract specifications and regulatory requirements. Allegheny Millwork will maintain the capability to provide the necessary services by having the required resources available, including materials, equipment, and personnel.

Warranty claims should be directed to the Allegheny Millwork Project Manager. Allegheny Millwork will respond to warranty claims within the timeframe required by contract and will repair or replace defective work at no cost to the owner.

WARRANTY SUMMARY

Work Scope	Warranty Period	Contact for Warranty Claims
Architectural Casework	1 Year	Allegheny Millwork
Interior Finish Carpentry	1 Year	Allegheny Millwork
Exterior Finish Carpentry	1 Year	Allegheny Millwork
Hardware (Manufacturer)	Per MFR	